
SPECIFICATIONS

Model Number:MR2D3Version:01Part Number:19032118AJan 09,2018



Mechanical Drawing:

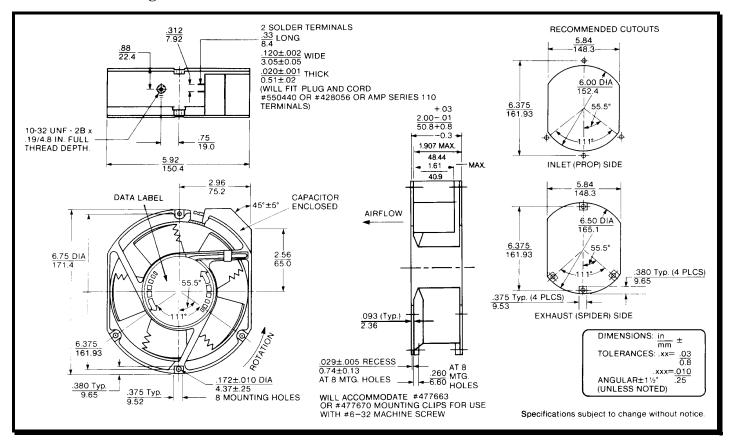

Motor:

Nominal Voltage = 115 VAC Frequency = 50 / 60 Hz

Nominal Running Current = 0.170 / 0.150 amps

Max. Locked Rotor Current = 0.225 amps Running Power = 18.0 / 16.0 watts Average Speed = 1400 / 1700 RPM

Bearings = Ball

Air Flow = 94 / 114 CFMAcoustic = 35.1 / 39.2 dBA

Construction:

Venturi: Single Piece Die Cast Aluminum, Black.

Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 62,000 hours at 40°C.

Additional Features:

Permanent Split Capacitor Motor

Thermal Protection Automatic Restart

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Additional Features:

2x0.120" Terminals

Agency Approvals:

UL, CUL, CE

PQ Curve:

