
SPECIFICATIONS

Model Number: ST48Z3 Rev:00





Mechanical Drawing:

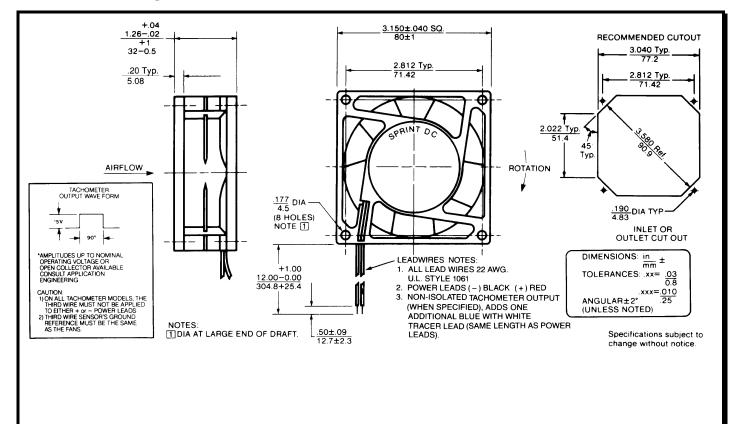

Motor:

Nominal Voltage =48 vdcOperating Voltage Range = 24 - 56 vdcNominal Running Current = 0.12 amps Max. Locked Rotor Current = 1.10 amps**Running Power** = 5.8 watts Average Speed = 4700 RPMBearings = BallAir Flow =45 CFM

Construction:

Acoustic:

Venturi: Plastic, Black, UL 94V-0 Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 62,400

= 51.5 dBA

hours at 40°C.

Additional Features:

Brushless DC Motor

Electronic Locked Rotor Protection

Polarity Protected

Automatic Restart Capability

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, 22AWG, UL 1061

Red – Power Black - Return

Agencies:

UL,CUL,CE

PQ Curve:

